PICK-UP BROOM WITH INTERNAL WATER TANK

Available widths 72" & 84"

Patent-pending internal water tank design with industry-leading capacity to control dust without compromise.



Standard with 26" diameter poly/wire wafers; all-poly wafers also available.

15-25 GPM RECOMMENDED FLOW RATE DIRECT DRIVE MOTOR
WITH RELIEF VALVE PROTECTION


GREATER THAN
2000 LB
LOADER OPERATING CAPACITY









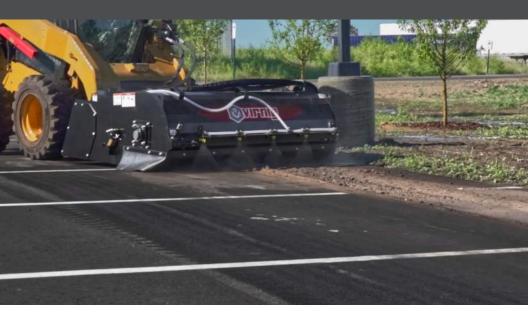







- 1. 55-GALLON INTERNAL WATER TANK WITH CAPACITY INDICATORS PROVIDES 35 MINUTES OF CONTINUOUS RUNTIME
- 2. ADJUSTABLE VALVE REGULATES WATER PRESSURE
- 3. RECESSED & GUARDED MOTOR
- 4. HD BUCKET WITH WEAR BARS & BOLT-ON EDGE
- 5. OVERSIZED 2" GREASEABLE BEARING
- 6. PIN ADJUSTMENT SYSTEM TO QUICKLY SET BRISTLE HEIGHT
- 7. REPLACE WAFERS EASILY WITHOUT DISCONNECTING HOSES, STANDARD WITH POLY/WIRE WAFERS

MODEL	PBWI72	PBWI84
Sweeping Width (in.)	72.0	84.0
Overall Width (in.)	79.3	91.3
Overall Height (in.)	31.3	
Overall Depth (in.)	73.0	
Number of 26 Inch Diameter Wafers	35	41
Recommended Flow Rate (GPM)	15-25 Standard Flow Only	
Approximate Weight (lbs)	1330	1465
Recommended Loader Capacity	Greater than 2000 lbs	