

## V50 UTILITY BUCKET

Available widths 60", 66", 72", 78" & 84"

General purpose bucket for handling dense and bulk materials.




**AVAILABLE EDGE OPTIONS**  
See page 88 for additional information.



<b>38.1"</b> DEPTH	<b>24.0"</b> HEIGHT	<b>UP TO 20 CU FT</b> STRUCK CAPACITY (VARIES BY MODEL)	<b>UP TO 24 CU FT</b> HEAPED CAPACITY (VARIES BY MODEL)	<b>LESS THAN 2400 LB</b> LOADER OPERATING CAPACITY
-----------------------	------------------------	---	---	---

1. 3/4" x 6" WELD-ON EDGE

2. 1/2" x 4" WEAR BARS  
PROTECT THE BUCKET  
BOTTOM

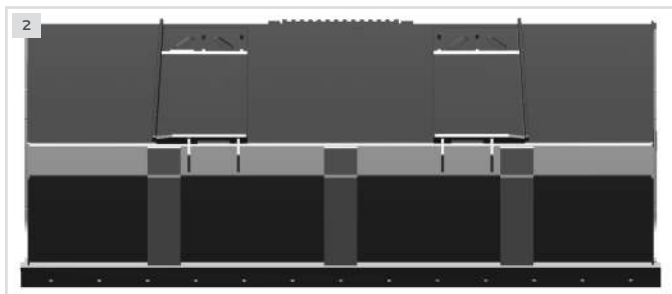

MODEL	UHV60	UHV66	UHV72	UHV78	UHV84
Width: Overall / Inside (in.)	61.5 / 59.3	67.5 / 65.3	73.5 / 71.3	79.5 / 77.3	85.8 / 83.3
Overall Height (in.)	24.0				
Depth: Overall / Inside (in.)	38.1 / 34.9				
Capacity: Struck / Heaped (cu. ft.)	14.4 / 17.3	16.0 / 19.2	17.6 / 21.1	19.2 / 23.0	20.8 / 24.9
Bucket Back Angle (degrees)	66				
Shell Thickness (in.)	0.19	0.19	0.25	0.25	0.25
Side Plate Thickness (in.)	0.25				
Structural Wear Bars Under Bucket (1/2" x 4")	2	2	2	3	3
Approximate Weight (lbs)	470	500	595	650	680
Recommended Loader Capacity	Less than 2400 lbs				